


The **MINI Pump** is designed to transfer corrosive chemicals from small drums and storage vessels. Electric or Air powered motors provide additional versatility for low volume transfer applications. The ergonomic design makes the **MINI Pump** an ideal solution for laboratory use.

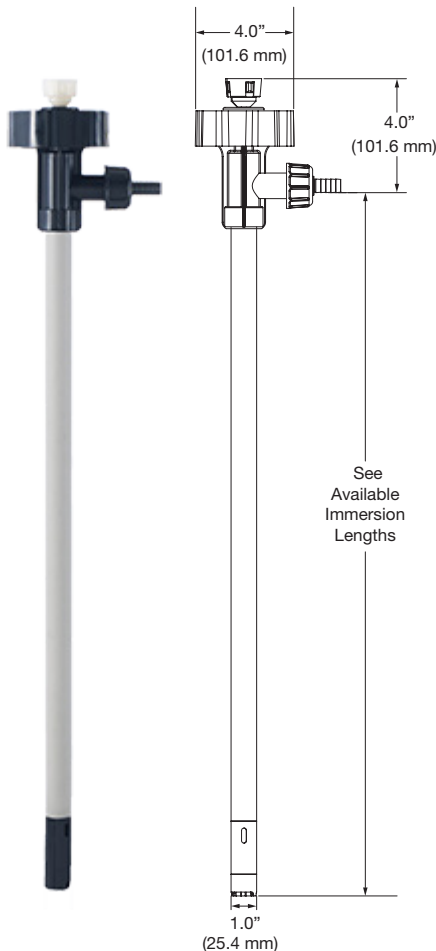

Common Applications

- Corrosive Chemicals
- Acids
- Alkalies
- Life Sciences
- Organic Compounds

Features

- Lightweight & Portable
- Designed for Low-Volume Applications
- Chemically Resistant
- Electric or Air Powered

Technical Specifications

Pump Design:	Sealless / Centrifugal
Discharge:	1/2" (12,7 mm) Hose Barb
Wetted Materials:	Polypropylene, Carbon Graphite, Hastelloy C-276
Motor Drive Options:	110V & 220V Single Phase, Pneumatic
Maximum Viscosity: <i>(based on motor option)</i>	250 cps (mPas)
Maximum Discharge Pressure:	6.0 psi (0,41 bar)
Maximum Flow Rate: <i>(based on water)</i>	5.5 gpm (20,8 lpm)
Maximum Temperature:	130°F (55°C)
Duty Cycle:	Intermittent
Available Immersion Lengths:	20" (500 mm), 27" (700 mm), 39" (1000 mm)