STANDARD PUMP
A UNIBLOC® BRAND

Technical Specifications

Enclosure: .....TEFC (IP54)
Washdown: .....No
Voltage: 190/380//230/460
Horsepower (KW):.....1 (.75)
Phase:.....3
Amps:.....4.6/2.3//4.2/2.1
Frequency: .....50-60 Hz
Insulation Class:.....F
Power Factor.....65
Frame:.....D100LC
RPM:.....750-900
Noise Level:.....70 dBa
Certification:.....UL & CSA
Weight:.....56 lbs (25,5 kg)

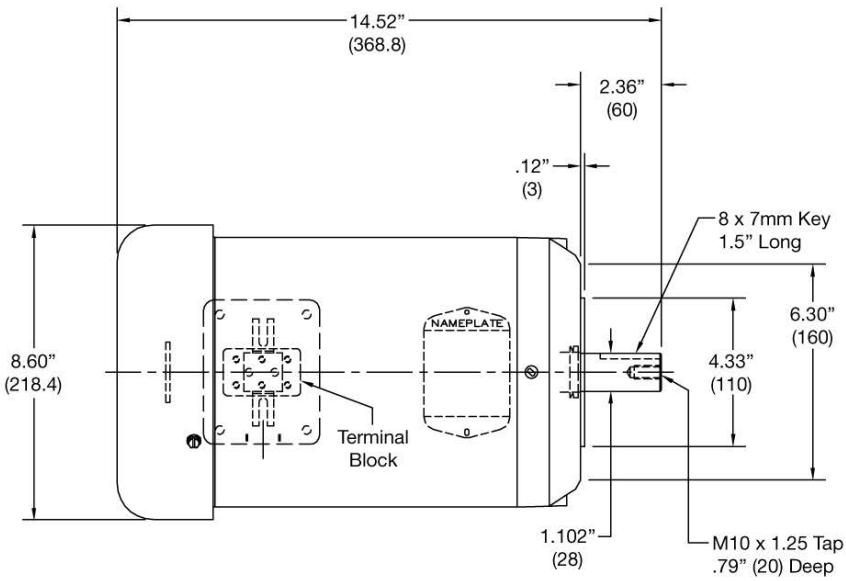

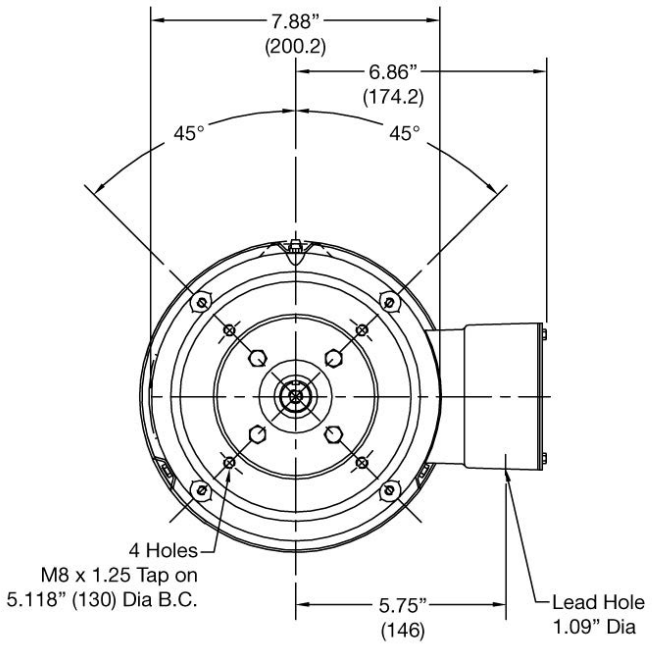

WARNING: Not suitable for pumping flammable or combustible liquids or use in a hazardous duty environment.

Note: Only compatible with the SP-700DD or 800DD Series pump.