

SANITARY PROCESS EQUIPMENT

Diaphragm Pumps



FOOD GRADE | BALL CHECK

- Available in 1½", 2" and 3" Sizes
- Flow Rates to 234 gpm (886 lpm)
- FDA Compliant Materials (CFR Title 21)



FOOD GRADE | BALL CHECK

- Available in 1½", 2" and 3" Sizes
- Flow Rates to 234 gpm (886 lpm)
- FDA Compliant Materials (CFR Title 21)




SANITARY | FLAP CHECK

- Maximum Solid Size is 3.8" (9,7 cm)
- Gentle Product Treatment
- Pump Rotates 360° for Cleaning



POULTRY | FLAP CHECK

- Ideal for Transferring Livers, Necks, Hearts & Gizzards
- Clean in Place Design (CIP)
- Oil-Free/Non-Sticking Air Valve

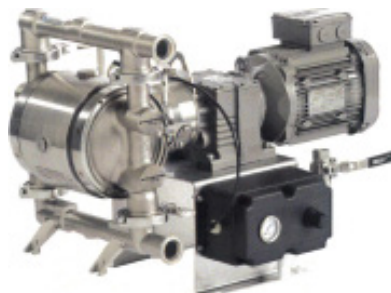

ELECTRIC | BALL CHECK

- Electric Drive Reduces Energy Consumption
- Eliminates Issues Commonly Associated with Mechanical Seals
- Minimal Pulsation on Pump Discharge



SANITARY PROCESS EQUIPMENT

Drum Pumps



DRUM UNLOADER

- 5:1 Double Ball Pump Design
- 4.3 Cycles Per Gallon (3.8L)
- 60 Cycles/min Max Speed

FDA CE UK Ex



LOW VISCOSITY | ELECTRIC

- Flow Rate to 35 gpm (132 lpm)
- 39" (1000mm) or 47" (1200mm) lengths
- 110v or 230v Variable Speed

FDA A 3 CE UK Ex



LOW VISCOSITY | AIR

- Flow Rate to 28 gpm (106 lpm)
- 39" (1000mm) or 47" (1200mm) lengths
- 1/2 and 3/4 HP Motors

FDA A 3 CE UK Ex



HIGH VISCOSITY | ELECTRIC

- Flow Rate to 12 gpm (45 lpm)
- Maximum Viscosity 100,000 cps (mPas)
- Available with 3/4 and 1 1/2 HP Motors

FDA A 3 CE UK Ex



HIGH VISCOSITY | AIR

- Flow Rate to 12 gpm (45 lpm)
- Maximum Viscosity 100,000 cps (mPas)
- Available with 2, 4 and 5 HP Motors

FDA A 3 CE UK Ex



PUMP LIFT

- Lightweight & Portable
- Designed for Drums & Tanks
- Rechargeable Battery Pack

CE

Unibloc Hygienic Technologies provides a broad portfolio of powerful solutions for companies around the world.