


TRANSPORT PUMPS

Food and Chemical Pumps
for the **Tanker Industry**



RELIABILITY FOR THE LONG HAUL

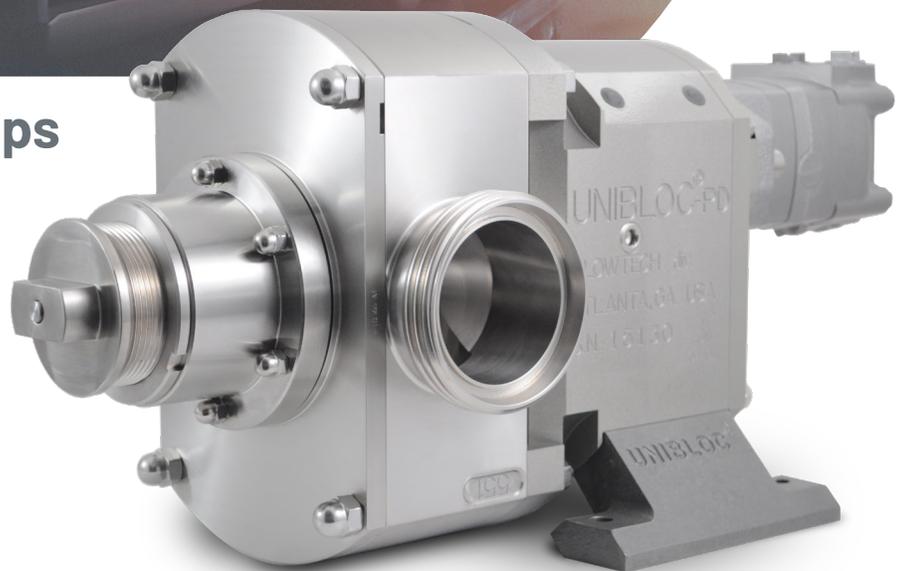

Tank transport professionals count on Unibloc® Hygienic Technologies to provide rugged and reliable chemical and food-grade pumps. For over 35 years, Unibloc has refined our Road Tanker pumps to deliver dependability and longevity expected by trusted fleets.

Unibloc's QuickStrip® CleanPlus™ pumps are the first to eliminate damage from over/under torqued rotor bolts. CleanPlus slashes disassembly and seal maintenance from hours to just minutes. CleanPlus also offers a very clean and crevice free design.

FEATURES AND BENEFITS

- 3A sanitary design
- Longest lasting, most dependable seals
- Xtreme shaft sleeves for durability and reduced maintenance
- Durable dual coated gearbox
- Hydraulic drive mount
- Jacketed pump head (optional)
- Integrated Pressure Relief Valve
- ATEX certified design

SERVICE

We provide the best service, support and pump training to create a better customer experience.

AVAILABILITY

With the fastest delivery in the industry, Unibloc is ready to provide for your entire fleet.


DURABILITY

The longest lasting pump with the most reliable seals producing the most ROI on the market.



CONVENIENT

Our Drop-In Fit for replacing other pump brands makes switching to Unibloc Road Tanker pumps easier than ever.

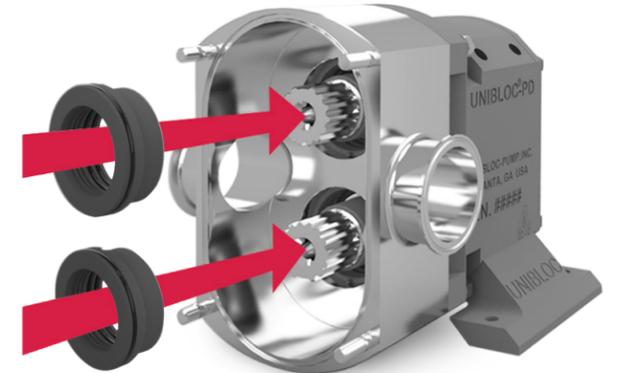

BETTER SEALS

Unibloc shaft seals are the longest lasting and most versatile in the industry. Front loaded, double o-lip, double o-ring or mechanical seals mean quick and easy maintenance and accessibility.



FEATURES AND BENEFITS INCLUDE:

- Stainless Steel
- Heat dissipation up to 13 kW (17.5 HP)
- Capable of system pressure of 315 Bar [4570 psi]

HYGENITEC OIL COOLERS

A rugged and dependable centrifugal fan designed for maximum performance and reliable operation. Built to keep you on the road with easy maintenance, exclusive through the filter filling and 18-35% increased efficiency over the competition.



SPECIFICATIONS


<i>Optional sizes available</i>	Food Grade Pumps		Chemical Pumps	
Pump Size	551	576: 3" or 4"	501 CHEM	551 CHEM
Max Cap. GPM [LPM]	228 [863]	253 [958]	198 [750]	252 [954]
Max Pres. PSIG [Bar]	250 [17]	200 [13]	250 [17]	250 [17]
Max Speed RPM	800	800	900	900
Weight lbs [kg]	115 [52]	126 [57]	104 [47]	115 [52]
Connections	TRI-CLAMP, ACME, DIN, SMS		NPT, BSP, FLANGES, DIN, CAM LOCK	

DIMENSIONS

<i>Dimensions: inches [mm]</i>	Food Grade Pumps		Chemical Pumps	
Pump Size	551	576: 3" or 4"	501 CHEM	551 CHEM
Port Size	3.0"	3.0" or 4.0"	2.5"	3.0"
A-PTO	13.0" [330]	13.7" [349]	12.4" [314]	13.0" [330]
A-Charlynn	19.1" [486]	19.9" [505]	18.5" [470]	19.1" [486]
A-Danfoss	17.4" [441]	18.1" [460]	16.7" [425]	17.4" [441]
B	10.9" [277]	11.7" [296]	10.3" [261]	10.9" [277]
C	03.2" [82]	03.6" [92]	02.9" [74]	03.2" [82]

Pump Shown in Horizontal Position

Dimensions: inches [mm]

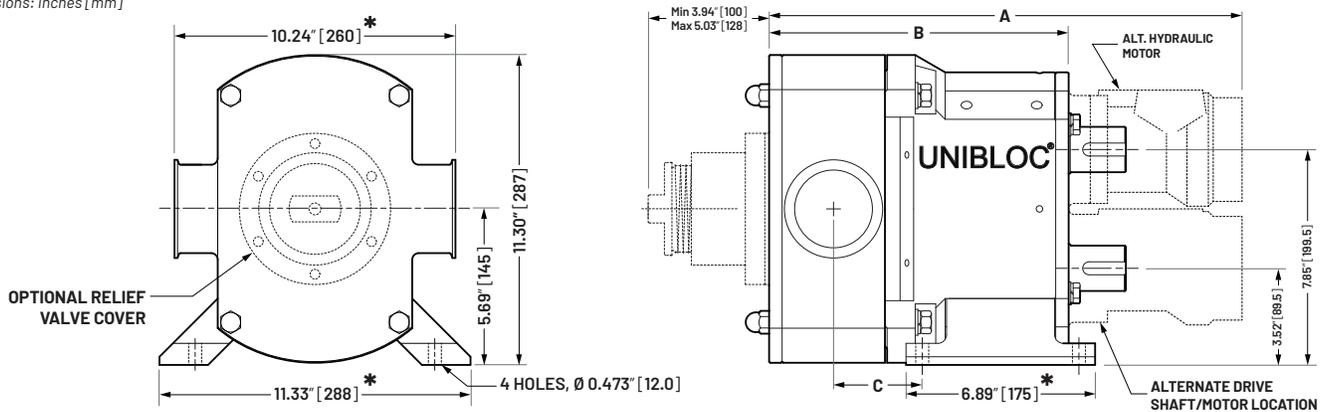

*** Competitor "Drop-in" Available. Contact Unibloc.**

Proven Pump Performance: For Those Who Demand More.

Unibloc Hygienic Technologies provides a broad portfolio of powerful solutions for companies around the world.



unibloctech.com



Copyright © 2026 Unibloc Hygienic Technologies